

EXPLANATION

OVERBURDEN ISOPACHS - Showing thickness of overburden, in feet, from surface to top of coal bed. Dashed where vertical accuracy possibly not within 40 feet. Isopach interval is 200 feet (61 m).

DRILL HOLE - Showing thickness of overburden, in feet, from surface to top of coal bed.





MINING-RATIO CONTOUR - Number indicates cubic yards of overburden per ton of recoverable coal by surface mining methods. Contours shown only in areas underlain by coal of Reserve Base thickness within the stripping-limit (in this quadrangle, the 200-foot-overburden isopach). To convert mining ratio to cubic meters of overburden per metric ton of recoverable coal, multiply mining ratio by 0.8428.

Av-3A - Adaville No. 3A  
COAL BED SYMBOL AND NAME

TRACE OF COAL BED OUTCROP - Showing symbol of name of coal bed as listed above. Dashed where inferred; short dashed where inferred by present authors.

TRACE OF FAULT - Arrows and symbols designate direction of movement when known; bar and ball on down-thrown side. Dashed where inferred or approximately located.

To convert feet to meters, multiply feet by 0.3048.

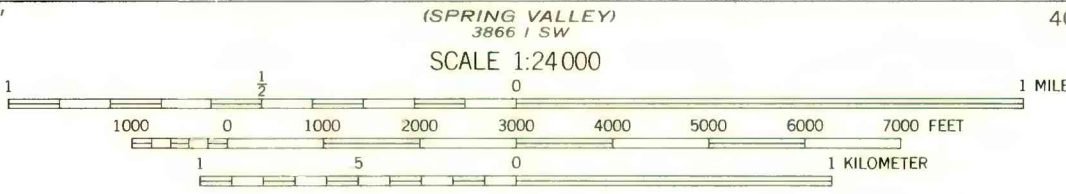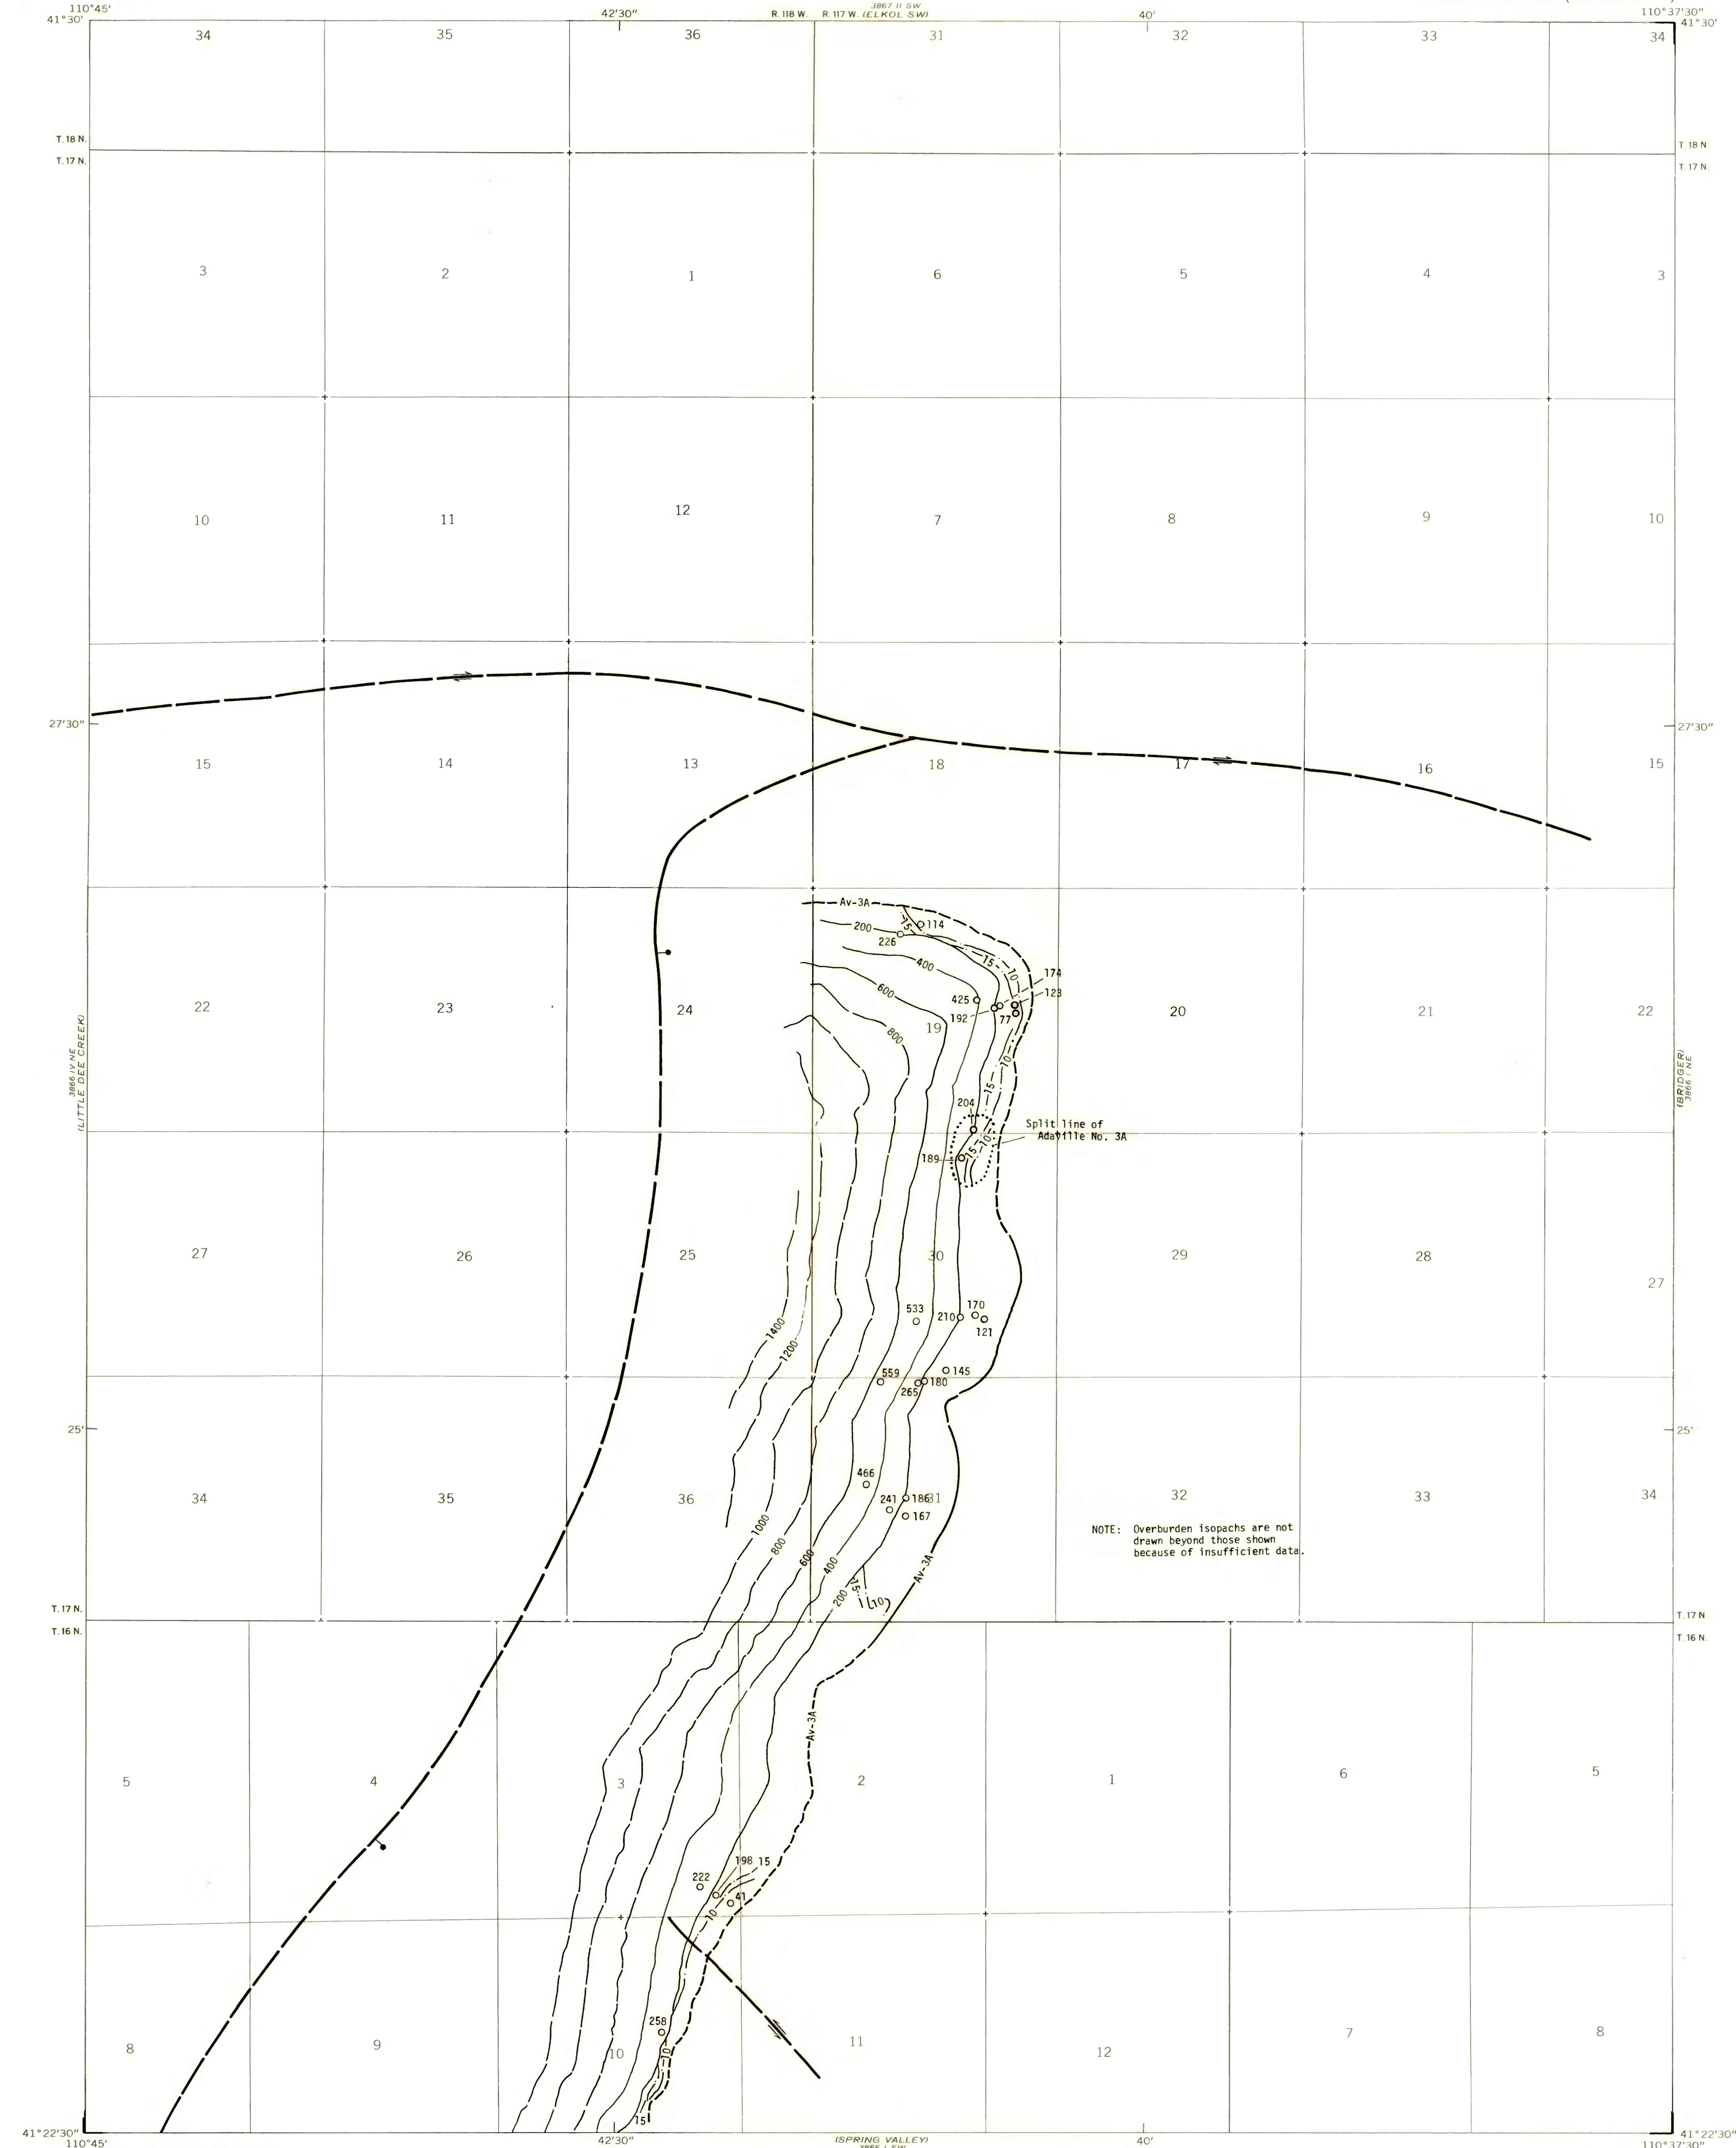

This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.

COAL RESOURCE OCCURRENCE MAP OF THE MEADOW DRAW  
QUADRANGLE, UINTA COUNTY, WYOMING  
BY  
DAMES & MOORE  
1979